

Technical Datasheet

UMT45-12K-EP


High strength and standard tensile modulus continuous carbon fibre based on polyacrylonitrile precursor used in various branches of industry.

Typical Carbon Fiber Properties

Tensile strength	4.5 GPa
Tensile modulus	260 GPa
Elongation at break	1.7 %
Linear density	780 tex
Density	1.78 g/cm ³
Carbon content	More than 95 %
Sizing ¹	EP
Sizing content ²	0.8–1.5 %

**Bobbin Properties**

Bobbin weight ³	4 kg
Length of fiber on bobbin	5260 m
Bobbin diameter with coiled fiber	160 mm
Height of fiber on bobbin	250–255 mm
Spool height	280 mm
Spool diameter	76.3 mm

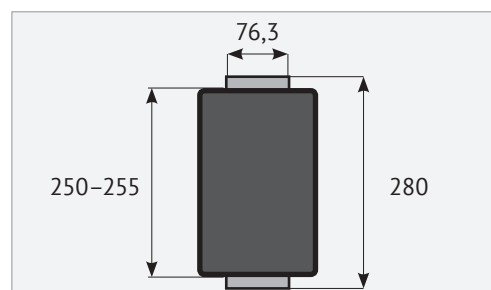

¹ CF can be produced with VE finish (compatible with vinyl ester resins).

² The sizing content (from 0.5%) and type can be varied based on customer's request.

³ 1 kg, 2 kg, 5–7 kg bobbins are available on request (may affect the price depending on the volume of the non-standard package batch).

Packaging

Carbon fiber is wound untwisted onto cardboard spool, sealed with heat shrunk PE or PVC foil and placed in cardboard box.

Certification

The products are produced in full compliance with ISO 9001-certified Quality Management System.